

SATA® filter 444™/474™/484™



SATA filter 400

Technical Data

Air inlet: G 1/2" female thread
Air outlet: 1/4" male thread
Max. inlet operating pressure: 15.0 bar
Max. outlet operating pressure: 10.0 bar
Air flow at 6.0 bar: 3600 NI/min
Max. ambient temperature: 120 °C
Max. ambient temperature with activated charcoal: 60 °C

Combi filter


Euro

92296	SATA filter 444 double-stage sinter filter/fine filter with pressure regulator and outlet module (2 x 1/4" male thread)	
92833	SATA filter 444 with carrying support double-stage sinter filter/fine filter, pressure regulator, outlet module (2 x 1/4" male thread)	
92304	SATA filter 444 L double-stage sinter filter/fine filter with pressure regulator, for pipeline installation (G 1/2" female thread)	
92312	SATA filter 474 double-stage fine filter/activated charcoal without pressure regulator with outlet module (2 x 1/4" male thread)	
92320	SATA filter 484 triple-stage sinter filter/fine filter/activated charcoal with pressure regulator and outlet module (2 x 1/4" male thread)	
129619	SATA filter 484 with floor carrying support triple-stage sinter filter/fine filter/activated charcoal/floor carrying support with pressure regulator and outlet module (2 x 1/4" male thread)	
173195	SATA filter 484 mobil in a case, sintered filter/fine filter/activated charcoal with pressure regulator, air inlet G 1/2 a, air outlet (2x quick coupling)	

All prices are recommended list prices. Errors, technical modifications and printing errors reserved.

Spare Parts SATA® filter 444™/474™/484™

Art. No./Descr.
2923
Pressure spring
2949
Diaphragm
15511
Automatic condensate drain valve
22046
Pressure gauge 0 - 10 bar, 50 mm
22137
Cyclone separator
22160
Sintered filter
23804
Pressure valve
24471
Plastic nut with 2 O-rings for SATA filter series 300 and 400
24489
Threaded rod with pressure valve head
24521
Condensate retainer with O-ring
24554
Filter sleeve with automatic discharge valve
24562
Adapter, cpl. with O-ring
73890
Threaded rod
78360
Gasket
80457
Spindle for SATA filter series 400
81810
Fine filter cartridge
83113
Fixing nut
84871
Filter sleeve
85373
Activated charcoal cartridge
95851
Countersunk screw M 5 x 16
96883
Pressure adjustment screw
158808
Manifold 2x 1/4" (male thread)

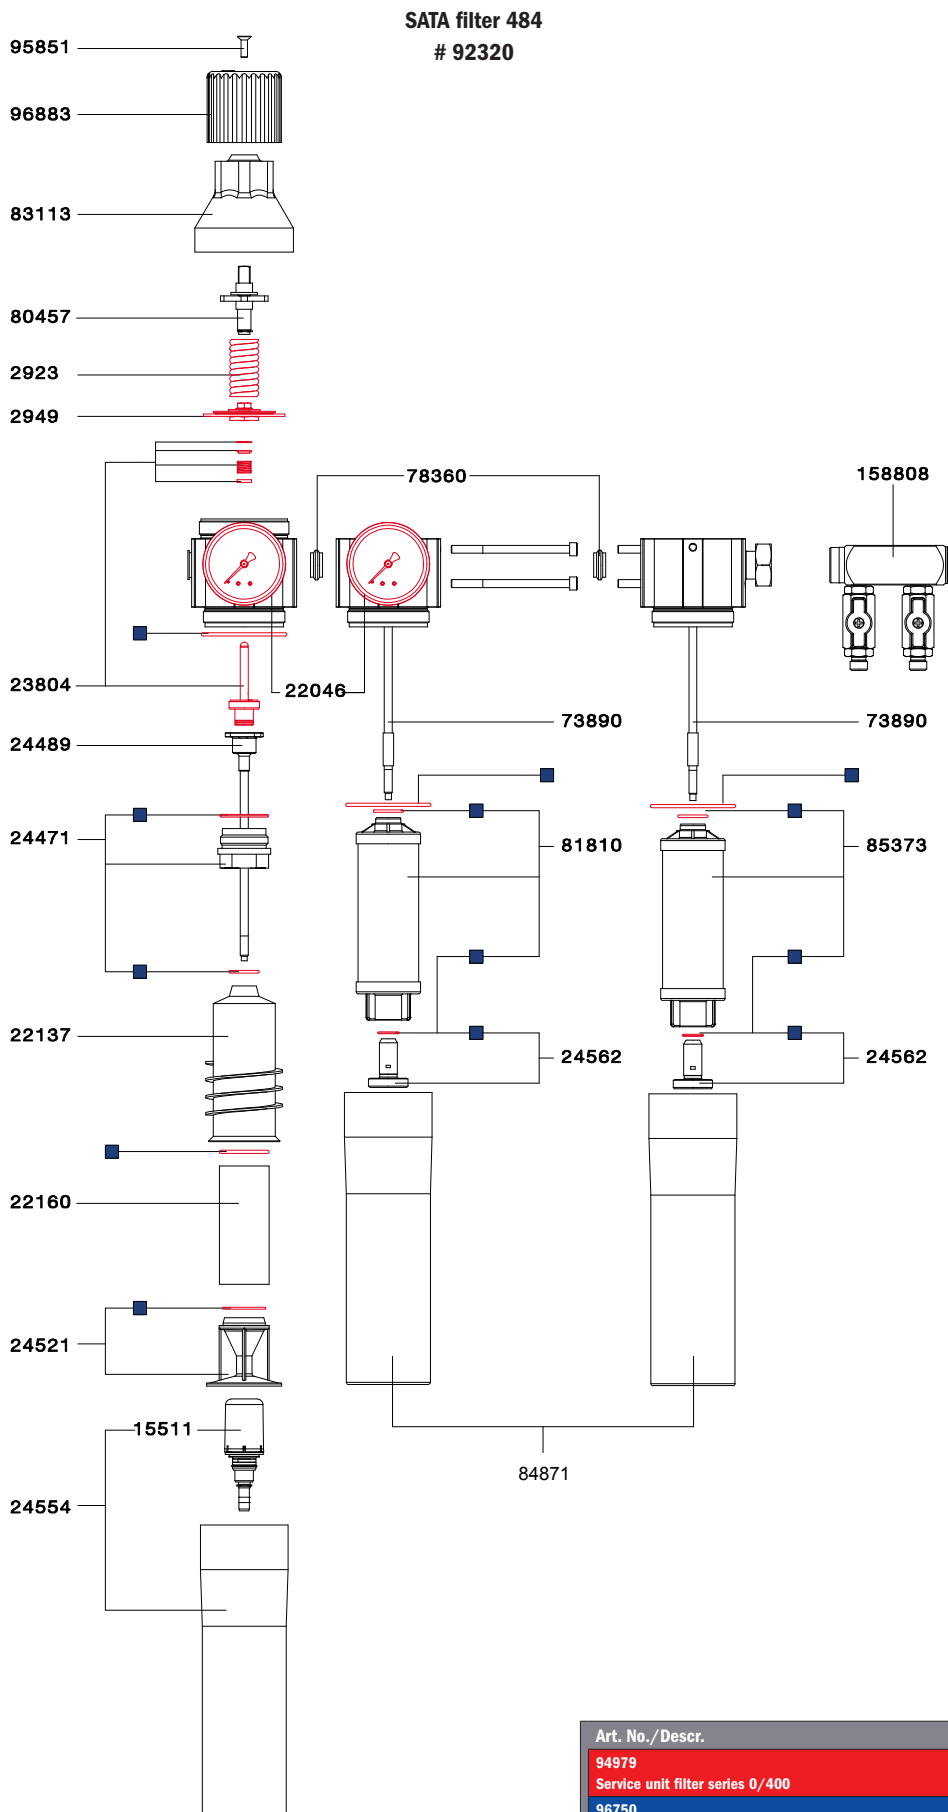

Art. No./Descr.
94979
Service unit filter series 0/400
96750
Sealing kit

All prices are recommended list prices. Errors, technical modifications and printing errors reserved.