



Hydraulic Garage Jack




Special Quality Design

Polished and treated cylinder rams use high performance seals.



Polished inner cylinder walls extend the life of the seals to minimize abrasion and wear.

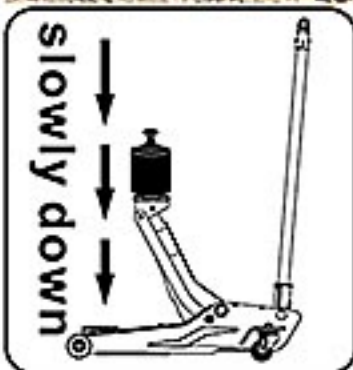

With GS CE



3 TON

T830025



Complies with
ASME
Safety Standards

2.5 TON

T825021

Complies with
ASME
Safety Standards

3 TON

T830022



Model	Capacity	Min. Height (mm)	Max. Height (mm)	Product Size (mm)	N.W. / G.W. (kg)	Package Size (mm)	QTY/20'CY (PCS)
T830025	3 Ton	130	465	572x328x175	27.4 / 28.9	620x380x215	540
T825021	2.5 Ton	140	520	662x342x180	34.1 / 36.1	733x380x225	450
T830022	3 Ton	140	520	662x344x180	35 / 36.3	733x380x225	528

www.tongrunjacks.com